



CDX20-3020

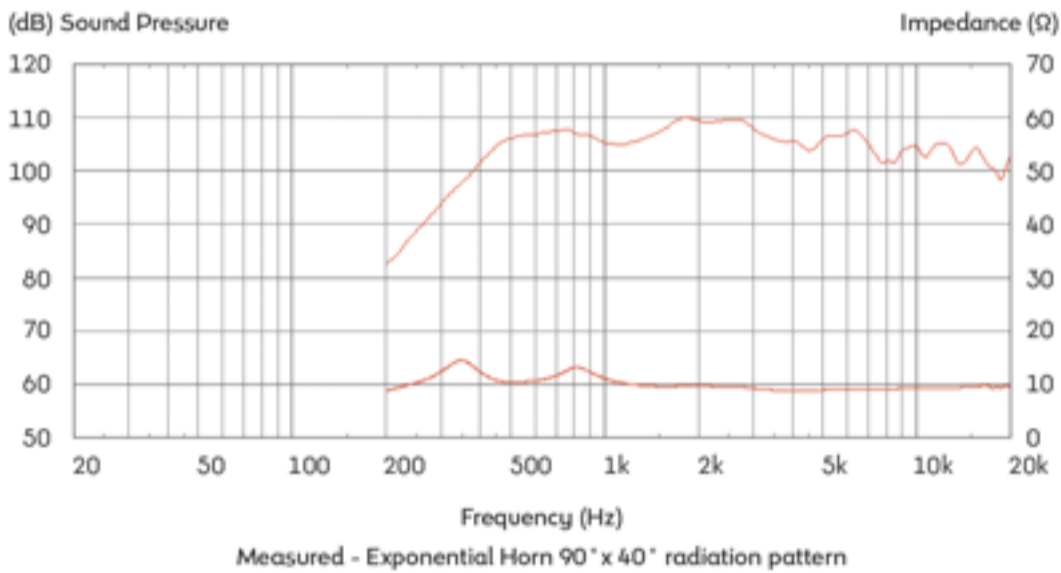

- 800Hz recommended min. crossover freq (12dB/oct)
- Single piece titanium diaphragm and surround

8 Frequency Response

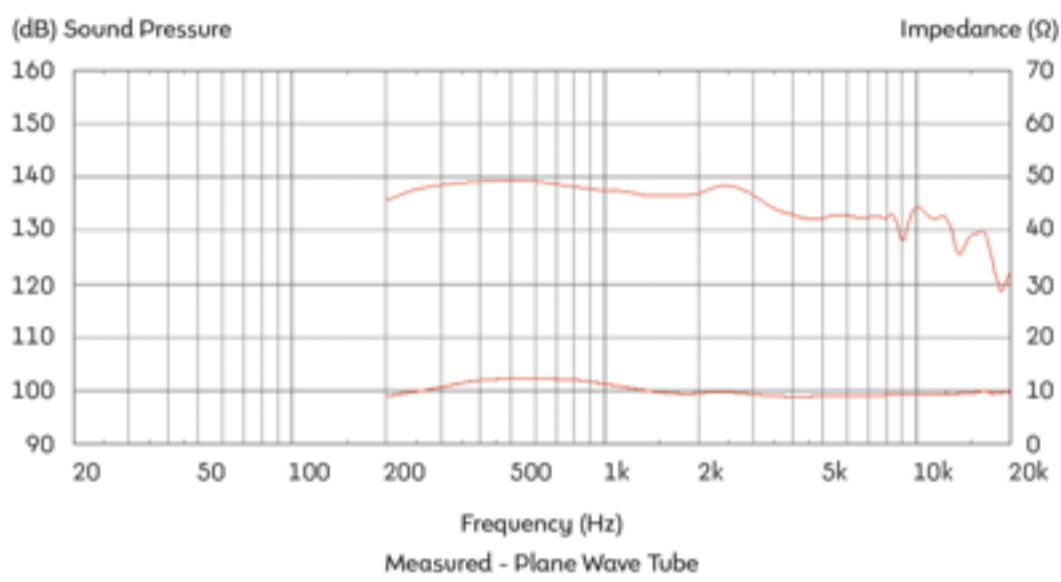

1. Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.
2. Continuous Power Rating is defined as 3dB greater than the AES rating.
3. Measured on axis at 1W, 1m, using typical horn, in 2Ĥ anechoic environment.

General Specifications

Power rating ¹	100Wrms
Continuous power rating ²	200W
Nominal impedance	8
Frequency range	500-20,000Hz
Sensitivity ³	107dB
Recommended min. crossover (12dB/oct)	800Hz
Voice coil diameter	75mm/3in
Voice coil material	Edgewound copper clad aluminium
Magnet type	Ferrite
Diaphragm material	Titanium
Surround material	Titanium

Mounting Information

Width	180mm/7in
Depth	68mm/2.7in
Weight	4.9kg/10.8lb
Fitting	Flange (4 x M6 holes on 102mm /4.0inch PCD)
Throat exit	50mm/2in

Packed Dimensions & Weight

Single pack size W x D x H	214mm x 196mm x 82mm /8.4in x 7.7in x 3.2in
Single pack weight	5.1kg/11.2lb